





# Irys




	Irys mini	Irys mega
A (in)	7.4	11.1
B (in)	5.9	9.8
C (in)	6.9	6.9
Weight (lbs)	8	13
ScX (m <sup>2</sup> ): 0°	0.21	0.22




If the external cable, light source or driver contained in this light are damaged, they have to be exclusively replaced by the manufacturer, his maintenance agent or an equally qualified worker, in order to avoid any risk




Irys mini



Irys mega




Irys camera





Irys loudspeaker

## Installation

1

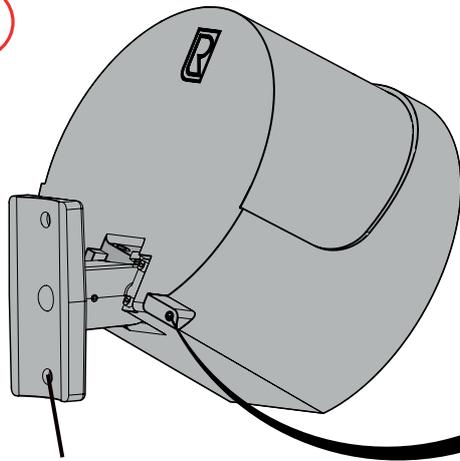

Ø11

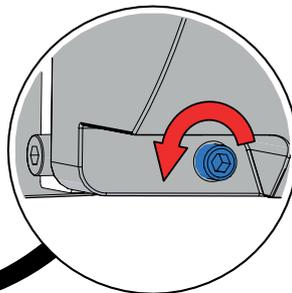


2



**Hardware Provided with Ragni  
Supplied Poles**

*\*Must apply RED Loctite\**


See page 4 : connection for  
luminaires with outgoing cable

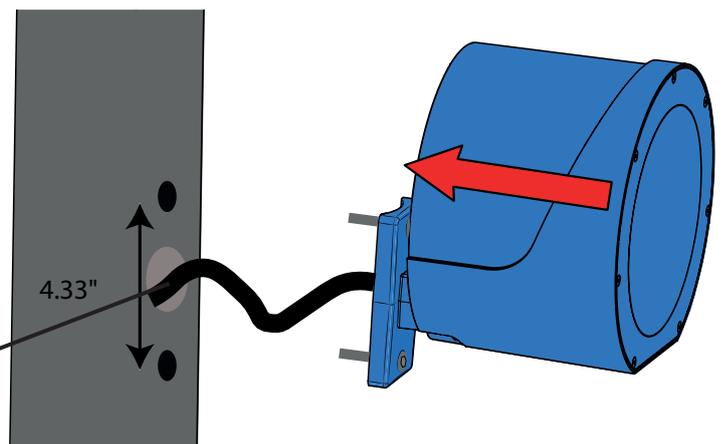

FIM0193F\_Irys


# Settings

1

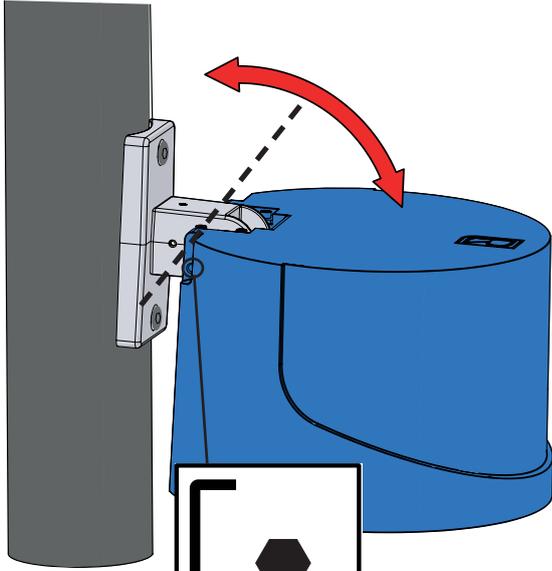

Tightening torque 4 N.m

2

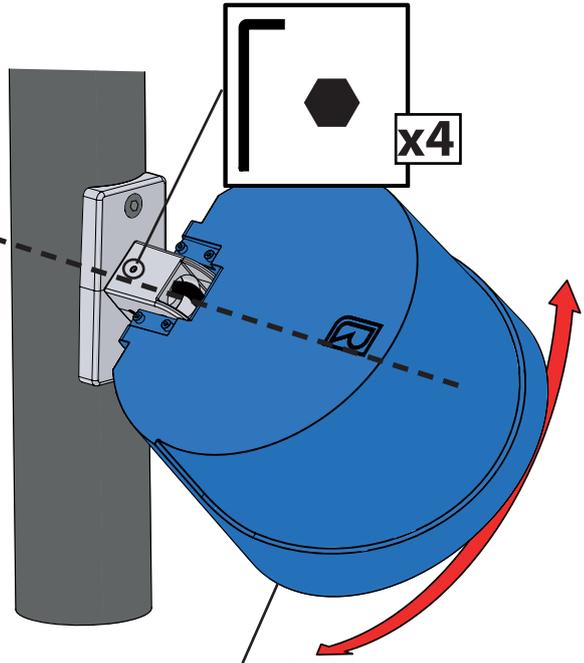


Tightening torque 4 N.m




Max one turn to avoid cable twisting

## Camera viewing angle settings


1

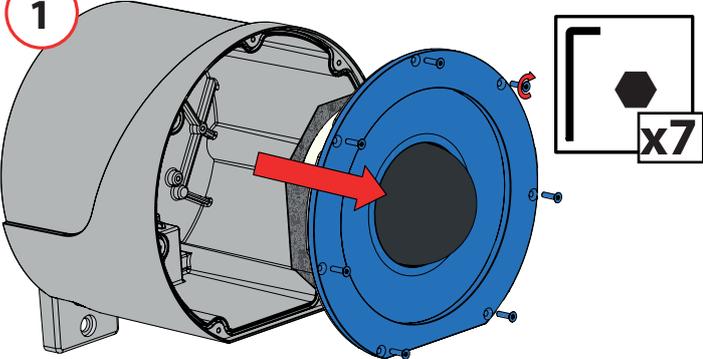

2

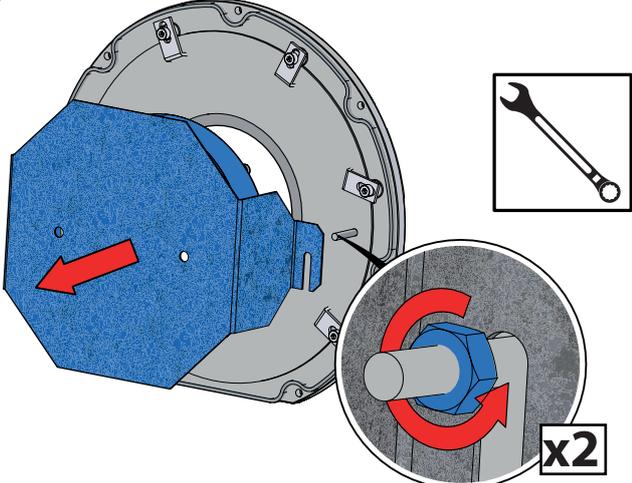



3

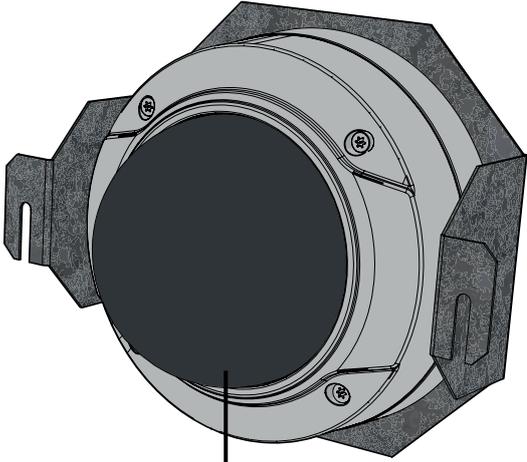

See the camera installation sheet to adjust the viewing angle


# Maintenance

## *Irys Mini*

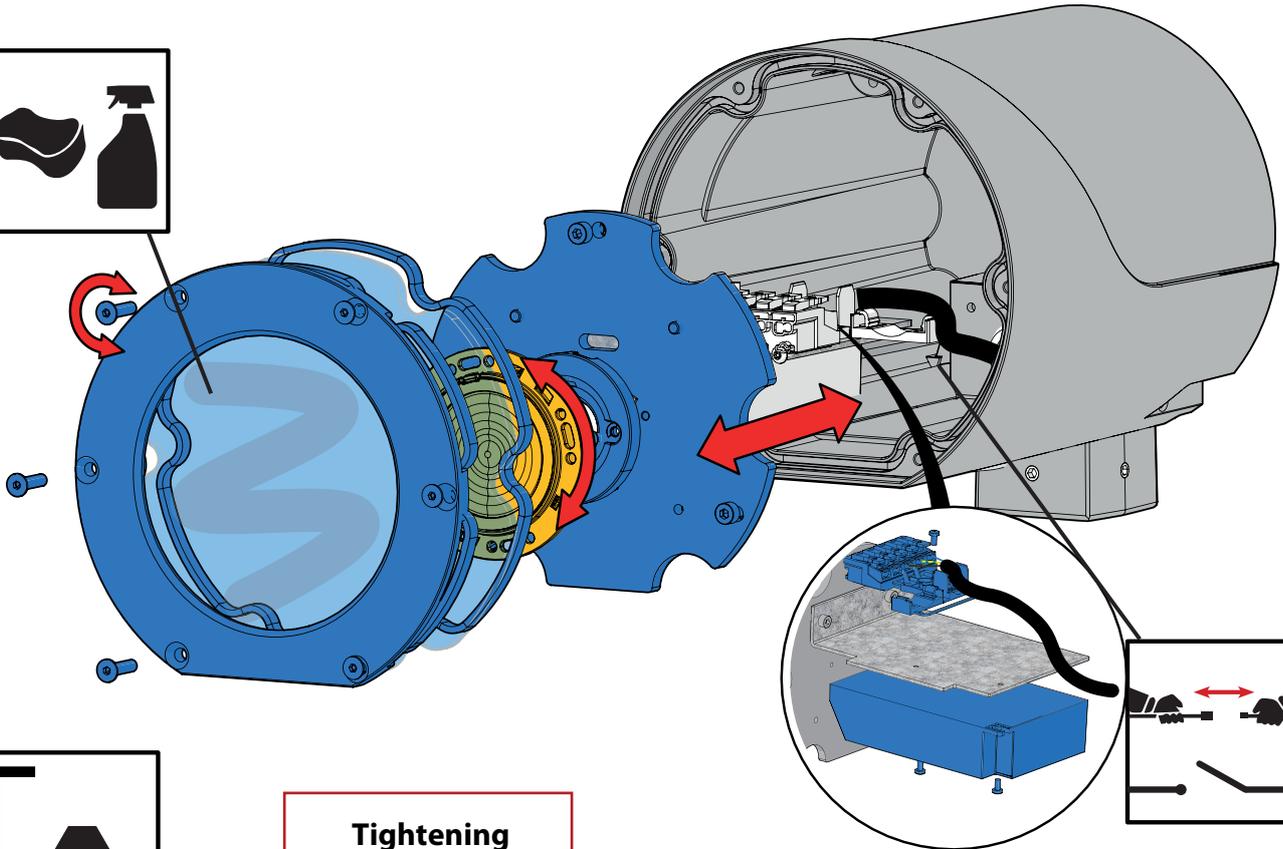


Tightening  
torque 2 N.m

## *Irys Méga*



Tightening  
torque 2 N.m

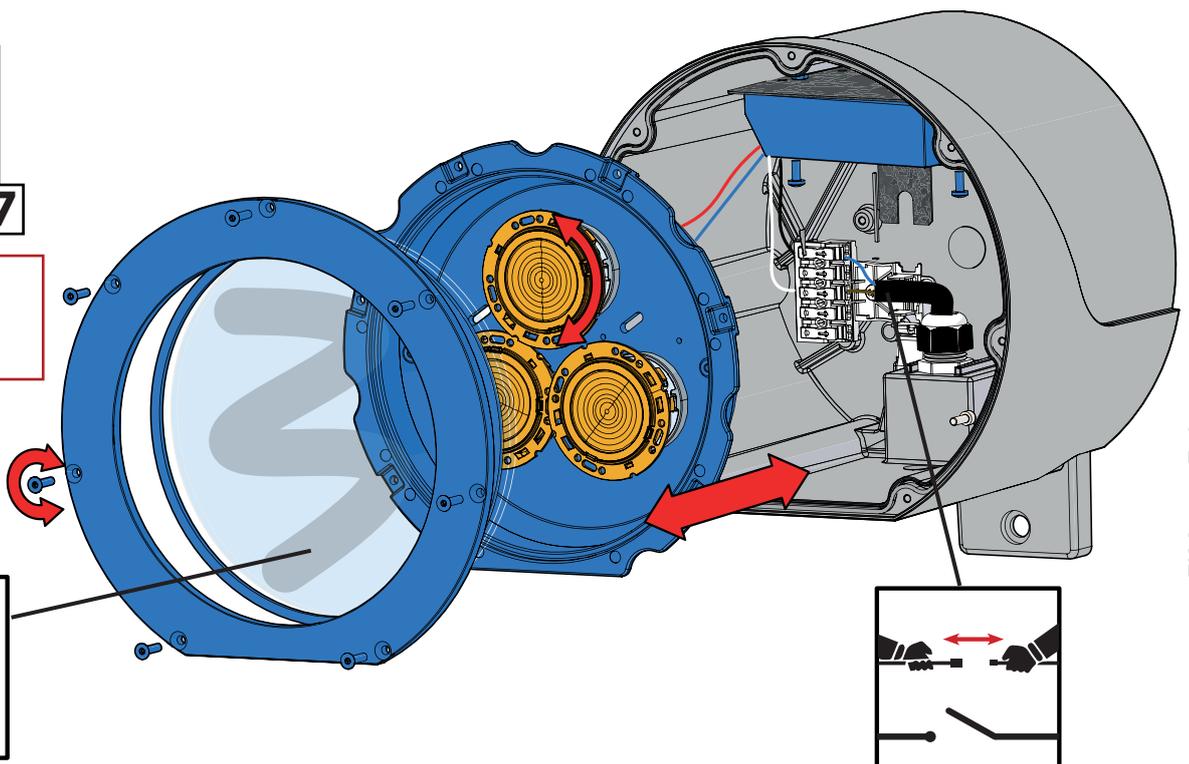

# Connection for luminaires with outgoing cable



Electrical connections of the junction box have to main the same insulation class the luminaire.

Nominal voltage	<b>120-277V &amp; 347-480V</b> Only for luminaires with drivers			
Number of poles and terminal section <small>*Dimming available upon request</small>	<b>CLII</b> 2x 1.5mm <sup>2</sup> 	<b>CLI</b> 3G 1.5mm <sup>2</sup> 	<b>CLII-DALI</b> 4x 1.5mm <sup>2</sup> 	<b>CLI-DALI</b> 5G 1.5mm <sup>2</sup> 
Fixation method	<b>Depend on the junction box</b>			

## Connection for the camera

See camera installation sheet

## Connection for the loudspeaker

